

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
17 July 2003 (17.07.2003)

PCT

(10) International Publication Number  
**WO 03/057341 A1**(51) International Patent Classification<sup>7</sup>: **B01D 9/00,**  
B01J 19/00, 19/10[FI/FI]; Kissansalmentie 18, FIN-06750 Tolkkinen (FI).  
**LOUHELAINEN, Jarmo** [FI/FI]; Haapasalmentie 10 C  
129, FIN-00960 Helsinki (FI).

(21) International Application Number: PCT/FI03/00008

(74) Agent: **BERGGREN OY AB**; P. O. Box 16, FIN-00101  
Helsinki (FI).

(22) International Filing Date: 8 January 2003 (08.01.2003)

(25) Filing Language: English

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,  
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,  
VC, VN, YU, ZA, ZM, ZW.

(26) Publication Language: English

(30) Priority Data:  
20020033 9 January 2002 (09.01.2002) FI(71) Applicant (*for all designated States except US*): **BORE-**  
**ALIS TECHNOLOGY OY** [FI/FI]; P. O. Box 330, FIN-  
06101 Porvoo (FI).(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,


(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **MÖRSKY, Esa**

[Continued on next page]

(54) Title: A CRYSTALLIZATION APPARATUS AND METHOD FOR THE FORMATION OF CRYSTALS IN A SUCH APPARATUS

(57) Abstract: The invention relates to a chamber for the crystallization of solid catalyst carrier. The chamber is provided with an acoustic generator (9) for loosening the carrier from the walls of the chamber.

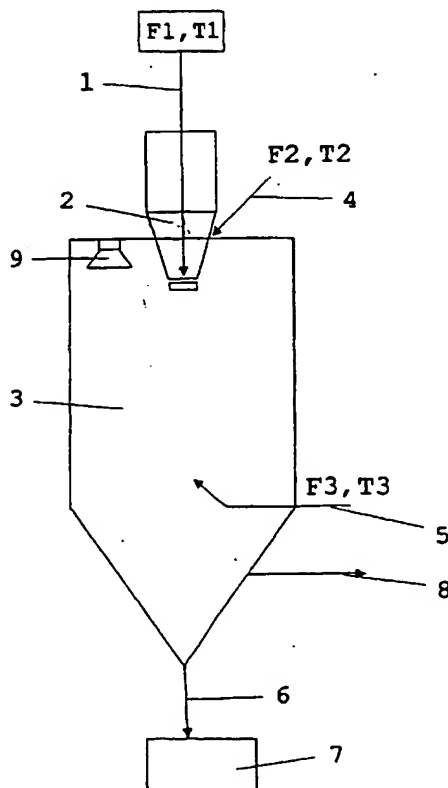

WO 03/057341 A1



ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI,  
SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN,  
GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— with international search report

1/PRTS

10/501079  
DT04 Rec'd PCT/PTO 09 JUL 2004**A CRYSTALLIZATION APPARATUS AND METHOD FOR THE FORMATION OF CRYSTALS IN A SUCH APPARATUS****Field of the invention**

5 The invention relates to the preparation of solid catalyst carriers by crystallization, and concerns crystallization chambers, methods for the crystallization of the carrier, and methods for removing the carrier from the crystallization chamber.

**Background of the invention**

10 Polymerization catalysts, such as Ziegler-Natta type catalysts, are usually deposited on solid carrier particles. The chemical composition, the structure of the surface, the morphology, and the size of the particles are important for the activity of the catalyst and for the properties of the polymer to be produced.

15 Certain carriers, such as  $\text{MgCl}_2 \cdot (\text{ROH})_n$ , in which R is an alkyl group and n is 1 to 6, are prepared by melting the substance and then crystallizing the melt in a spraying chamber. The crystallized particles are screened in order to remove too small and too big particles. The melt may be sprayed e.g. through a rotating nozzle, as described in EP 655 073. One problem in such processes is that the carrier tends to stick and agglomerate on the walls of the chamber. This decreases the yield and quality of the carrier. Pneumatic hammers have been used for removing the carrier from the walls. This has, however, not been very effective. Hammering also easily  
20 damages the chamber.

**Summary of the invention**

Now a chamber for the preparation catalyst carrier by crystallization, a method for preparing such carrier in a chamber, and a method for removing such carrier from a chamber have been invented in accordance with the independent claims. Some preferable embodiments of the invention are described in the dependent claims.  
25

In accordance with the invention, the chamber is provided with an acoustic generator, which produces a strong sound, which loosens the material from the walls of the chamber. The intensity of the sound may be e.g. 100 to 150 dB, preferably 120 to 140 dB, and most preferably 130 to 135 dB. The frequency of the sound is suitably  
30 over 5 Hz and below 20000 Hz, i.e. broadly at the audible range and below the ultrasonic range. Most suitably the frequency is below 10000 Hz. Preferably the range is 20 to 5000 Hz, more preferably 100 to 1000 Hz, and most preferably 400 to 600

Hz. The duration of the sound signal used may be e.g. 1 to 10 seconds, such as 3 to 7 seconds. The generator is preferably used at suitable intervals, e.g. at intervals of 0.2 to 2 minutes, preferably 0.3 to 0.7 minutes.

5 The acoustic generator may such as to comprise a vibrating metal diaphragm, which is vibrated pneumatically. The generator is usually provided with a horn. The horn should be pointed downwards in the chamber.

The chamber is usually a closed vessel surrounded by walls. The generator is preferably mounted in the top wall of the chamber.

10 The material is preferably removed from the chamber from its bottom. The chamber is typically an upright cylindrical chamber with a conical bottom. The volume of an industrial full scale chamber is typically 10 to 30 m<sup>3</sup>, such as 15 to 20 m<sup>3</sup>.

15 The carrier may be e.g. a magnesium containing carrier, such as  $\text{MgCl}_2 \cdot (\text{ROH})_n$ , in which R is an alkyl group and n is 1 to 6. Such a carrier is used especially for Ziegler-Natta type olefin polymerization catalysts. Silica is another typical carrier material.

20 In the crystallization chamber, melted material is sprayed into the chamber where it is cooled and crystallized. Cooling gas may be blown into the chamber. The cooling gas is preferably an inert gas, such as nitrogen. According to one embodiment, the melt is fed through a nozzle on the top of the chamber. Cooling gas is also fed on the top of the chamber. Additional cooling gas may be fed on a lower position. The second cooling gas usually has lower temperature.

25 In accordance with the invention, sticking of the catalyst material on the walls and outlet of the chamber and agglomeration of the catalyst material particles is effectively prevented. This is especially advantageous when the material is removed continuously from the chamber. The fraction of too large particles to be rejected is also thus decreased. The quality of the material is not decreased. No damage is caused to the chamber.

### Brief description of the drawings

The enclosed drawings form a part of the written description of the invention.

30 Fig. 1 shows the preparation of a catalyst carrier by a spraying process.

**Detailed disclosure of some embodiments of the invention**

Fig. 1 describes the preparation of a  $\text{MgCl}_2 \cdot (\text{C}_2\text{H}_5\text{OH})_n$  carrier material. The material is melted and fed through line 1 and nozzle 2 on the top of spraying chamber 3. The flow rate of the melt is F1 and temperature T1. Nitrogen is fed through line 4 on the top of the chamber. The flow rate is F2 and the temperature T2. T2 is lower than T1. A second nitrogen flow is fed through line 5 into the lower part of the chamber just above the conical bottom. The flow rate is F3 and the temperature T3. T3 is lower than T2. The carrier material crystallizes in the chamber and falls at the bottom, from where it is continuously removed through line 6 to screen 7. Gases are removed from the chamber through line 8.

An acoustic generator 9 (Nirafon, Lahti, Finland) is mounted inside the chamber 3 at the top, the horn pointing downwards into the chamber. The generator comprises a vibrating diaphragm at the frequency of 500 Hz. The maximum intensity of the sound is 135 dB. The horn is operated with 7 to 8 bar nitrogen.

The process was run under the following conditions:

F1	T1	F2	T2	F3	T3
kg/h	°C	kg/h	°C	kg/h	°C
25	115	340	64	650	-21

The acoustic generator 9 was blown for 5 sec after each 30 sec.

The process could be run without the material blocking the bottom outlet or sheeting the chamber walls. The longest uninterrupted run was 15 days. Even after that no sign of the carrier depositing on the walls or outlet was found.

As a comparison, the acoustic generator 9 was switched off. An immediate small drop in the outlet rate was observed. After 6 hours the outlet was totally blocked and it had to be opened. The run was continued and after 3 hours the outlet was almost totally blocked again. When the acoustic generator was taken in use again, after 15 hours a sudden flood of material was observed. This material had obviously been deposited on the walls of the chamber and was now suddenly dropped.

## Claims

1. Chamber for the crystallization of solid catalyst carrier, characterized in that the chamber is provided with an acoustic generator (9) for loosening the carrier from the chamber.
- 5 2. Chamber according to claim 1, wherein the chamber comprises a top wall and the acoustic generator (9) is mounted in the top wall.
3. Method for the preparation of solid catalyst carrier, in which method the carrier is formed in a chamber, characterized in that the inside of the chamber is subjected to a sound generated by an acoustic generator (9) for loosening the carrier from the  
10 chamber.
4. Method according to claim 3, wherein the intensity of the sound is at least 100 dB, preferably at least 120 dB, and most preferably at least 130 dB.
5. Method according to claim 3 or 4, wherein the frequency of the sound is over 5 Hz and below 20000 Hz, suitably below 10000 Hz, preferably 20 to 5000 Hz, more  
15 preferably 100 to 1000 Hz, and most preferably 400 to 600 Hz.
6. Method according to any of claims 3 to 5, wherein the duration of the sound is 1 to 10 seconds, preferably 3 to 7 seconds.
7. Method according to any of claims 3 to 6, wherein the sound is generated periodically, such as at intervals of 0.2 to 2 minutes, preferably at intervals 0.3 to 0.7  
20 minutes.
8. Method for removing crystallized solid catalyst carrier from a chamber, characterized in that the inside of the chamber is subjected to a sound generated by an acoustic generator (9) for loosening the carrier from the chamber.
9. Method according to claim 8, wherein the carrier is removed continuously from  
25 the chamber.
10. Use of an acoustic generator (9) for loosening crystallized solid catalyst carrier from a chamber.

1/1

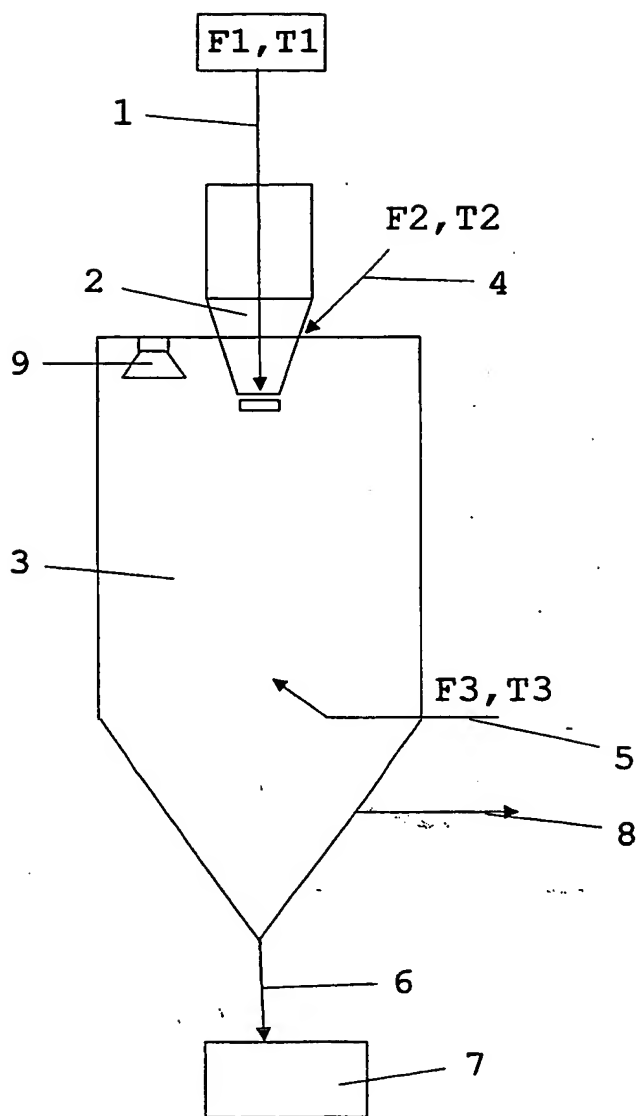


Fig. 1

## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/FI 03/00008

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B01D9/00 B01J19/00 B01J19/10

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B01D B01J B08B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 088 586 A (BASF AG) 4 April 2001 (2001-04-04) abstract column 1, line 56 -column 3, line 9 figures	1,3,5,8, 10
X	EP 0 054 328 A (TNO) 23 June 1982 (1982-06-23) page 4 -page 5, line 10 claims; figures	1,3,5,8, 10
X	WO 00 79095 A (ASYMPTOTE LTD ;ACTON ELIZABETH (GB); BP EXPLORATION OPERATING (GB)) 28 December 2000 (2000-12-28) page 6 -page 9, line 16 claims; figures	1



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

8 April 2003

Date of mailing of the international search report

15/04/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Hilt, D



## INTERNATIONAL SEARCH REPORT

International Application No

PCT/FI 03/00008

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 476 824 A (JOKINEN PETRI ET AL) 19 December 1995 (1995-12-19) abstract column 3, line 47 -column 4, line 50 claim 10; figures	3,8
A	EP 0 424 049 A (NESTE OY) 24 April 1991 (1991-04-24) the whole document	3,8

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/FI 03/00008

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 1088586	A	04-04-2001	DE	19946671 A1	05-04-2001
			EP	1088586 A1	04-04-2001
			US	6444181 B1	03-09-2002
EP 0054328	A	23-06-1982	NL	8006766 A	01-07-1982
			AT	8463 T	15-08-1984
			DE	3164917 D1	23-08-1984
			EP	0054328 A1	23-06-1982
			GB	2089230 A	23-06-1982
			JP	57122905 A	31-07-1982
WO 0079095	A	28-12-2000	AU	5548100 A	09-01-2001
			BR	0011851 A	05-03-2002
			EP	1190157 A1	27-03-2002
			WO	0079095 A1	28-12-2000
			JP	2003502155 T	21-01-2003
			NO	20022685 A	11-06-2002
			US	2002131923 A1	19-09-2002
US 5476824	A	19-12-1995	FI	921269 A	25-09-1993
			DE	69311481 D1	17-07-1997
			DE	69311481 T2	23-10-1997
			EP	0590115 A1	06-04-1994
			WO	9319100 A1	30-09-1993
			JP	3270474 B2	02-04-2002
			JP	6508397 T	22-09-1994
			NO	934212 A	24-01-1994
EP 0424049	A	24-04-1991	FI	84357 B	15-08-1991
			AT	131495 T	15-12-1995
			DE	69024168 D1	25-01-1996
			DE	69024168 T2	30-05-1996
			EP	0424049 A2	24-04-1991
			JP	2676425 B2	17-11-1997
			JP	3151037 A	27-06-1991
			US	5215949 A	01-06-1993